

multicycle

1. default is single cycle timing

Default Single-Cycle Timing

- All timing paths are constrained by single-cycle timing, by default, by the following implicit `set_multicycle_path` multiplier values:**
 - `-setup = 1`
 - `-hold = 0`
- Setup capture edge occurs 1 cycle after launch edge (for single clock)
 - Hold capture edge is relative to setup capture edge - occurs 1 edge before setup capture edge
- Increasing the *setup* multiplier without changing the *hold* multiplier moves both the setup and hold capture edges!**


```

create_clock -period 2 [get_ports CLK]
set_multicycle_path -setup 1 <all paths>
set_multicycle_path -hold 0 <all paths>
  
```

2. multicycle setup timing

```

create_clock -period 2 [get_ports CLK]
set_multicycle_path -setup 6 -from {A_reg[*] B_reg[*]} -to C_reg[*]
  
```

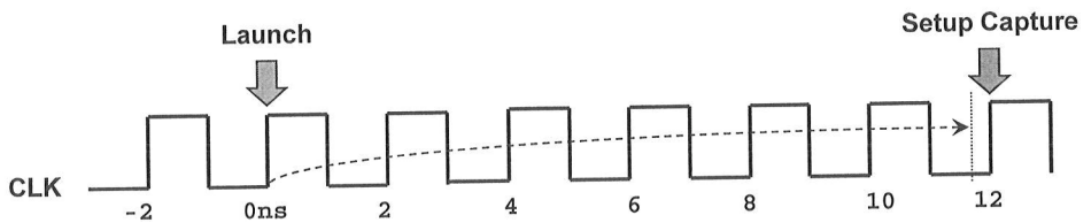


3. multicycle hold timing

默认的hold timing checkpoint是在capture cycle的前一个cycle, 基本要求是path delay必须要达到5个cycle, 即10ns, 这显然是不合理的。

```
set_multicycle_path -setup 6 -from {A_reg[*] B_reg[*]} -to C_reg[*]
```

- The hold multiplier remains 0 → Hold capture edge is 10 ns!

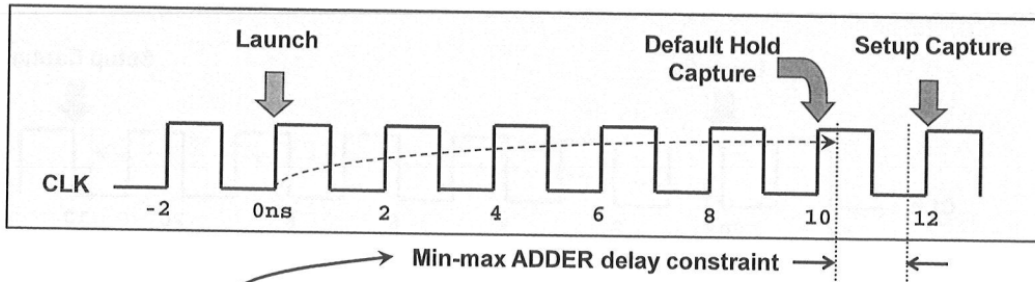

- Impossible to achieve and not required (no metastability concerns)!
- Hold check can safely occur at 0ns

于是有了下面的设置，在数据launch点即0ns位置处check hold timing, hold check点往前5个cycle

```
set_multicycle_path -setup 6 -from {A_reg[*] B_reg[*]} -to C_reg[*]
set_multicycle_path -hold 5 -from {A_reg[*] B_reg[*]} -to C_reg[*]
```

