

dc cmd

1. link_library target_library

```
set link_library "*" lib1.db lib2.db"
set link_library {* lib1.db lib2.db}

set target_library $link_library
```


#注意.db是一定要加的，是db完整的名字，不能省略

2. editing designs

Object	Task	Command
Cells	Create a cell	create_cell
	Delete a cell	remove_cell
Nets	Create a net	create_net
	Connect a net	connect_net
	Disconnect a net	disconnect_net
	Delete a net	remove_net
Ports	Create a port	create_port
	Delete a port	remove_port
		remove_unconnected_ports
Pins	Connect pins	connect_pin
Buses	Create a bus	create_bus
	Delete a bus	remove_bus

3. set_input_delay

`set_input_delay -max 0.6 -clock Clk [get_ports A]`

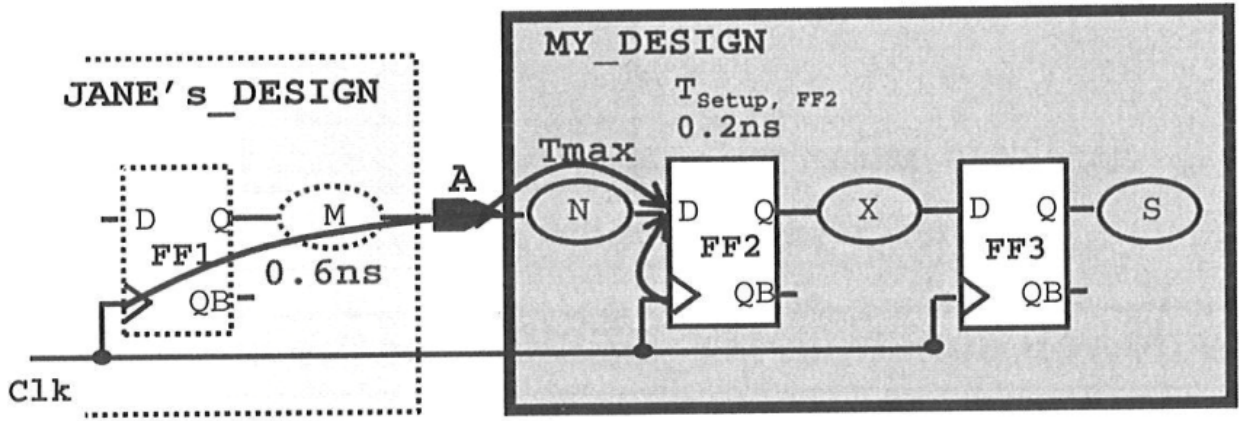

4. set_output_delay

`set_output_delay -max 0.8 -clock Clk [get_ports B]`

